


**Pinbelegung der Datenübertragungsschnittstelle:**

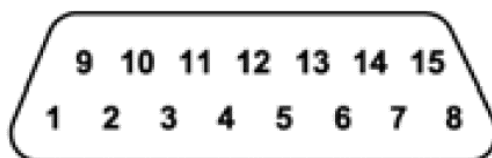

Pin	
1	RXD+ (RS-422 positive input)
2	RXD (RS-232 input)
3	TXD (RS-232 output)
4	TXD+ (RS-422 positive output) (-5 to -12 VDC with no audible alarm, 5 to 12 VDC with audible alarm)
5	Signal Ground (isolated from earth ground)
6	NC (No connection)
7	Normally Open (relay closure nurse call, normally open)
8	Normally Closed (relay closure nurse call, normally closed)
9	RXD- (RS-422 negative output)
10	Signal Ground (isolated from earth ground)
11	Nurse Call (RS-232 level output)
12	TXD- (RS-422 negative output) (-5 to -12 VDC with no audible alarm, 5 to 12 VDC with audible alarm)
13	NC
14	NC
15	Nurse Call Common